


REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	YCH 04/20/07	~	LJC 04/20/07
B	整理图面	YCH 05/14/07	~	LJC 05/14/07
C	整理图面	YCH 10/17/07	~	LJC 05/14/07
J	DRAWING UPDATE	JLZ 11/23/17'	~	

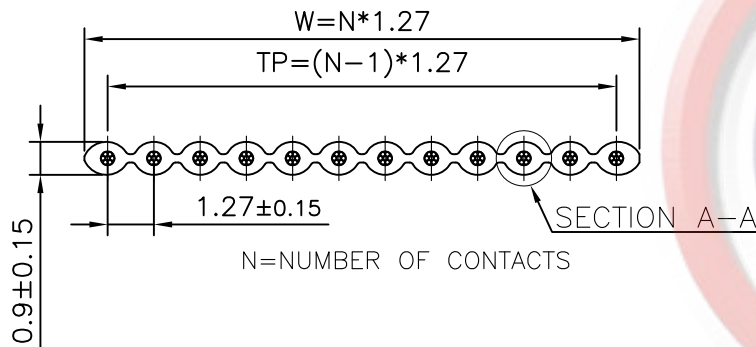


NOTES:



- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code
DS1057 - X X X X X-X

- Packing Specifications
 - 30.5: 30.5m/reel
 - 61.0: 61.0m/reel (For Dark Grey Only)
 - 76.5: 76.5m/reel
 - 153.0: 153m/reel
 - 457.0: 457m/reel
- Edge mark
 - R: Red mark
 - F: Flower mark
- Wire diameter
 - 1: ø0.100 (30AWG)
 - 2: ø0.127 (28AWG)
 - 3: ø0.090 (SPECIAL)
- Wire AWG
 - 28: 28AWG
 - 30: 30AWG
 - T: SPECIAL
- Cable color
 - A: Gray
 - S: Dark Grey
- No. Of positions
 - 06: 6pin
 - 64: 64pin



Number	Dimensions			Max. conductor resistance DC 20°C Ω/m	
	TP(mm)	W(mm)	Tolerance		
06	6.35	7.62	±0.30	ø0.100<0.397	
08	8.89	10.16	±0.30		
10	11.43	12.70	±0.30		
14	16.51	17.78	±0.30		
16	19.05	20.32	±0.30		
20	24.13	25.40	±0.30		
24	29.21	30.48	±0.30		
26	31.75	33.02	±0.30		
30	36.83	38.10	±0.30		ø0.127<0.237
34	41.91	43.18	±0.40		
40	49.53	50.80	±0.40		
50	62.23	63.50	±0.40		
60	74.93	76.20	±0.40		
64	80.01	81.28	±0.40		

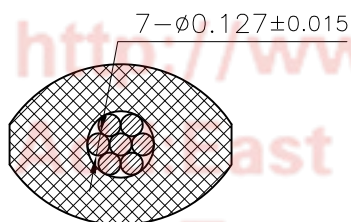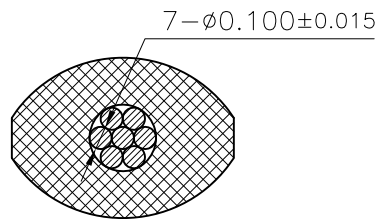

SECTION A-A (4:1)

SECTION A-A (4:1)

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°

PROJECTION	TITLE
UNITS: mm	2651 GRAY FLAT CABLE
SHEET SIZE: A4	SERIES: DS1057

DRAWING TYPE	CUSTOMER
SCALE: 1:1	SHEET: 1 OF 1
DRAWING NO.:	C-DS1057-XXXXX-X-J



晨翔电子有限公司

CONNPLY CONNPLY ELECTRONIC CO. LTD

Tel: 86-574-6350777
 Fax: 86-574-6350777
 E-mail: sale@connply.com
 http://www.connply.com
 P.C: 315335