


| REV. | DESCRIPTION | DRAWN | CHECKED | APPROVED |
|------|----------------|---------------|---------|--------------|
| A | NEW RELEASE | YCH 04/20/07 | ~ | LJC 04/20/07 |
| B | 整理图面 | YCH 05/14/07 | ~ | LJC 05/14/07 |
| C | 整理图面 | YCH 10/17/07 | ~ | LJC 05/14/07 |
| J | DRAWING UPDATE | JLZ 11/23/17' | ~ | |

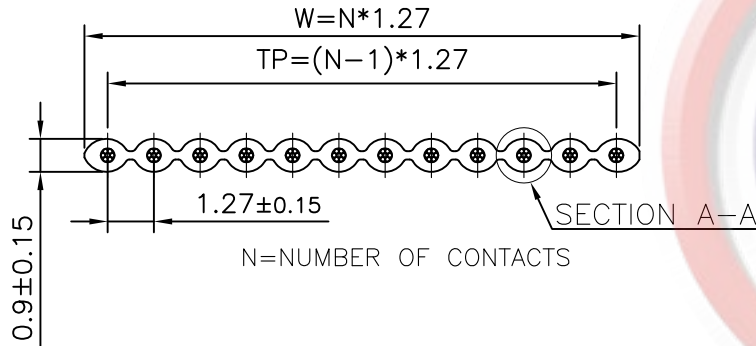

NOTES:

- Insulation material: PVC
Color: Grey
- SPECIFICATION
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- APPLICATION
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code

DS1057 - X X X X X-X

Packing Specifications
30.5: 30.5m/reel
61.0: 61.0m/reel(For Dark Grey Only)
76.5: 76.5m/reel
153.0: 153m/reel
457.0: 457m/reel


Edge mark
R: Red mark
F: Flower mark

Wire diameter
1: φ0.100 (30AWG)
2: φ0.127 (28AWG)
3: φ0.090 (SPECIAL)



Wire AWG
28: 28AWG
30: 30AWG
T: SPECIAL

Cable color
A: Gray
S: Dark Grey

No. Of positions
06: 6pin
64: 64pin

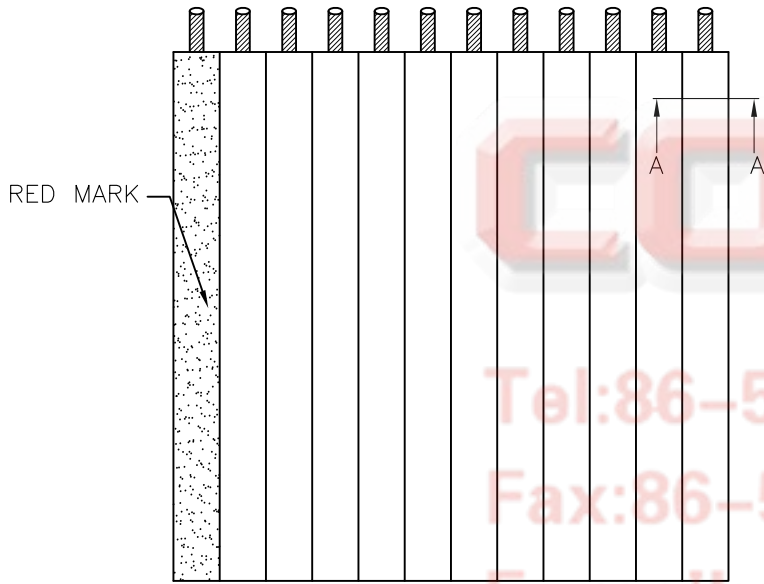

| Number | Dimensions | | | Max. conductor resistance DC 20°C Ω/m | |
|--------|------------|-------|-----------|---|--------------|
| | TP(mm) | W(mm) | Tolerance | | |
| 06 | 6.35 | 7.62 | ±0.30 | φ0.100<0.397 | |
| 08 | 8.89 | 10.16 | ±0.30 | | |
| 10 | 11.43 | 12.70 | ±0.30 | | |
| 14 | 16.51 | 17.78 | ±0.30 | | |
| 16 | 19.05 | 20.32 | ±0.30 | | |
| 20 | 24.13 | 25.40 | ±0.30 | | |
| 24 | 29.21 | 30.48 | ±0.30 | | |
| 26 | 31.75 | 33.02 | ±0.30 | | |
| 30 | 36.83 | 38.10 | ±0.30 | | φ0.127<0.237 |
| 34 | 41.91 | 43.18 | ±0.40 | | |
| 40 | 49.53 | 50.80 | ±0.40 | | |
| 50 | 62.23 | 63.50 | ±0.40 | | |
| 60 | 74.93 | 76.20 | ±0.40 | | |
| 64 | 80.01 | 81.28 | ±0.40 | | |

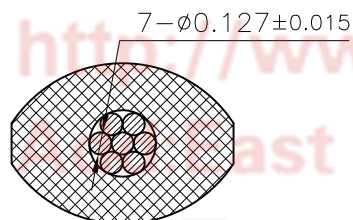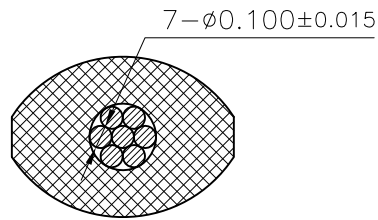

SECTION A-A (4:1)

SECTION A-A (4:1)

| GENERAL TOLERANCE | | ANGLE TOLERANCE | |
|-------------------|-------|-----------------|-----|
| X. | ±0.60 | X. | ±5° |
| .X | ±0.38 | .X | ±3° |
| .XX | ±0.25 | .XX | ±2° |

| PROJECTION | TITLE |
|----------------|----------------------|
| UNITS: mm | 2651 GRAY FLAT CABLE |
| SHEET SIZE: A4 | SERIES: DS1057 |

| DRAWING TYPE | CUSTOMER |
|--------------|--------------------|
| SCALE: 1:1 | SHEET: 1 OF 1 |
| DRAWING NO.: | C-DS1057-XXXXX-X-J |



晨翔电子有限公司

CONNLY CONNLY ELECTRONIC CO. LTD