



Assembly Instruction for Miniature Connector JP 0012

Cable Types

JP 0012 is suitable for Brüel & Kjær cables with the following diameters.

- 1.0 mm diameter (e.g. AC 0066)
- 1.5 - 1.6 mm diameter (e.g. AC 0205 and AC 0104)
- 2.0 mm diameter (e.g. AC 0005 and AC 0208)


Parts List:

1	DB 0601	Bushing	
1	DB 1484 *	Rear Piece	for 1.0 mm diameter cable
1	DB 2749 *	Rear Piece	for 1.5 - 1.6 mm diameter cable
1	DB 0602 *	Rear Piece	for 2.0 mm diameter cable
1	DL 2014	Spring	
1	JL 0028	Contact Pin	
1	YJ 0233	Insulator	
1	YM 0415	Locking Ring	



Assembly Tool

Assembly tool QA 0035 is required for mounting the miniature connector on cables

Assembly Instruction

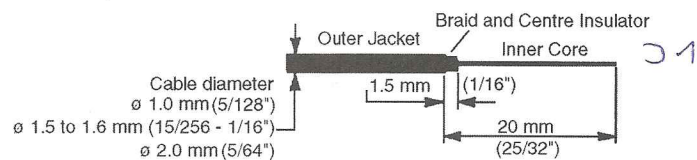

If the outer surface of the centre insulation is graphite coated, you must clean the exposed insulation by scraping off the graphite to prevent leakage

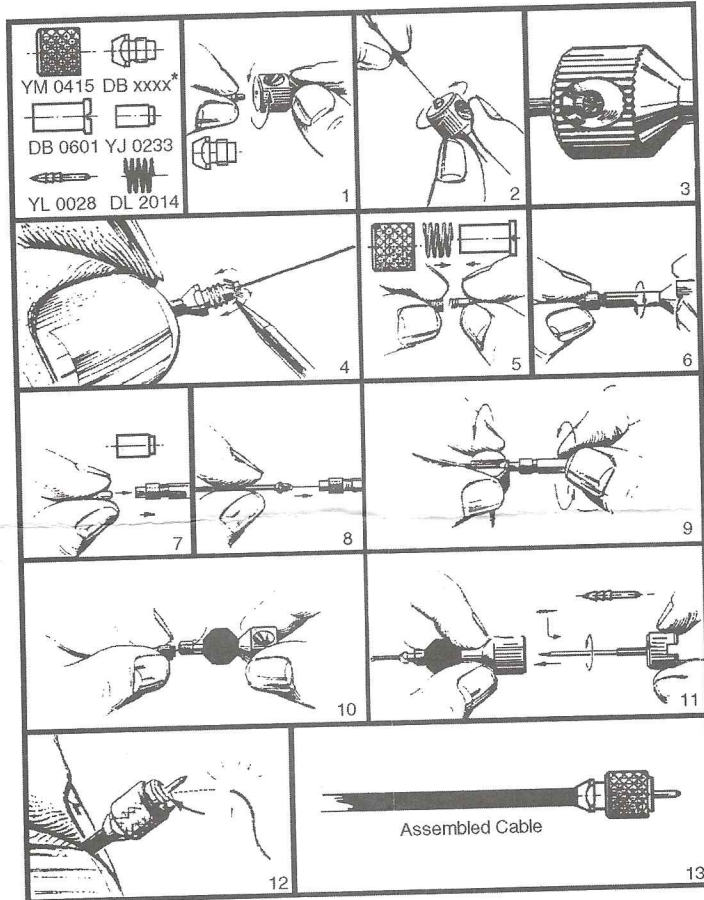

960123/2e