


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/28/20'		

The information provided herein is from CONNELY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNELY or its affiliates. Unauthorized use of the information herein, in any form or by any means, without the prior written permission of CONNELY, is strictly prohibited. CONNELY may enforce its intellectual property rights at its own discretion, failures or delays to exercise such rights does not constitute a waiver of such rights.

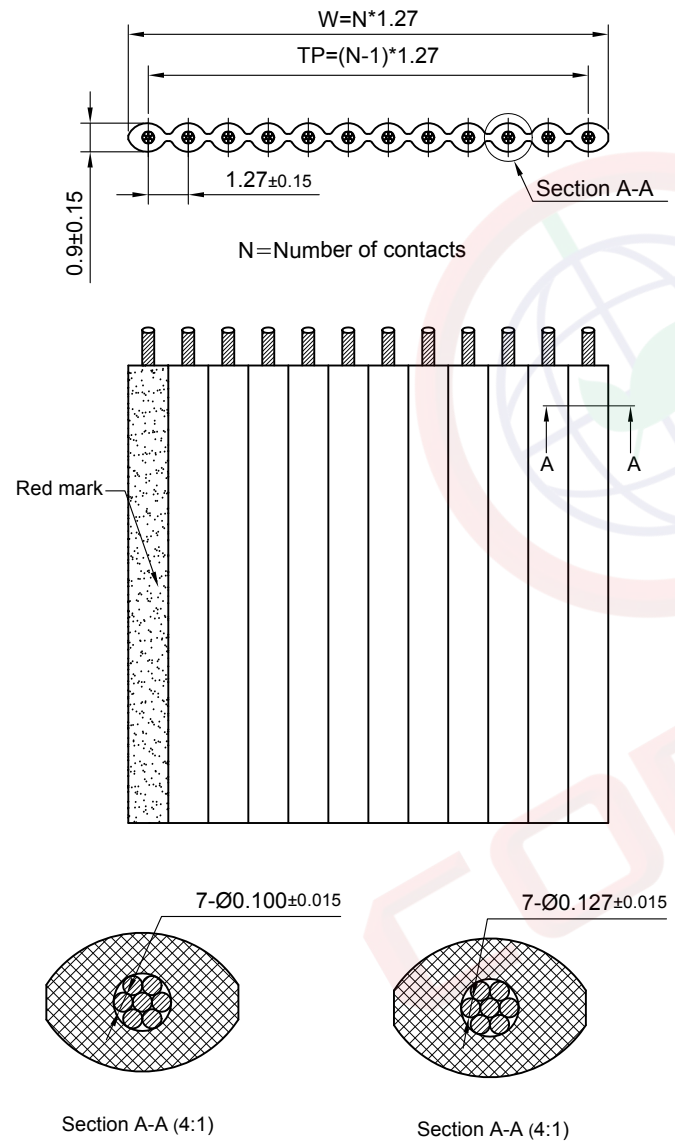

NOTES:

- Materials:**
 - Insulation: PVC, Grey.
 - Conductor: Copper with tin plating.
- Specification:**
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- Application**
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code

DS1057 - X X X X X-X

- Packing Specifications
 - 30.5: 30.5m/reel(100ft)
 - 61.0: 61.0m/reel(200ft) (For Dark Grey Only)
 - 76.5: 76.5m/reel(250ft)
 - 153.0: 153m/reel(500ft)
 - 459.0: 459m/reel(1500ft)
- Edge mark
 - R: Red mark
 - F: Flower mark
- Wire diameter
 - 1: ∅0.100 (30AWG)
 - 2: ∅0.127 (28AWG)
- Wire AWG
 - 28: 28AWG
 - 30: 30AWG
- Cable color
 - A: Gray
 - S: Dark Grey
- No. Of positions
 - 06: 6pin
 - 64: 64pin

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m	
	TP(mm)	W(mm)	Tolerance		
06	6.35	7.62	±0.30	∅0.100<0.397	
08	8.89	10.16	±0.30		
10	11.43	12.70	±0.30		
14	16.51	17.78	±0.30		
16	19.05	20.32	±0.30		
20	24.13	25.40	±0.30		
24	29.21	30.48	±0.30		
26	31.75	33.02	±0.30		
30	36.83	38.10	±0.30		∅0.127<0.237
34	41.91	43.18	±0.40		
40	49.53	50.80	±0.40		
50	62.23	63.50	±0.40		
60	74.93	76.20	±0.40		
64	80.01	81.28	±0.40		

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±0.60	X.	±5°
.X	±0.38	.X	±3°
.XX	±0.25	.XX	±2°
DRAWING TYPE	CUSTOMER		
SCALE	1:1	SHEET	1 OF 1
DRAWING NO.	C-DS1057-XXXXX-X-A		

PROJECTION		TITLE	2651 GRAY FLAT CABLE	
UNITS	mm	SERIES	DS1057 SERIES	
SHEET SIZE	A4			

晨翔电子有限公司
CONNFLY CONNELY ELECTRONIC CO. LTD