

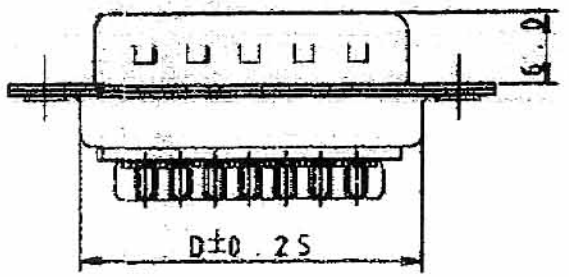


1 2 3 4 5 6 7 8

www.pewtronic.cz **PLU020180**

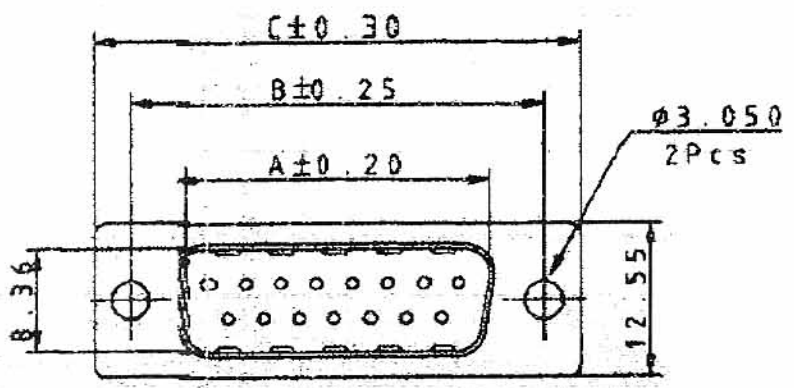

SPECIFICATION

Current Rate : 3Amps.
 Insulation Resistance: 1000Megaohms Minimum
 at 500V DC.
 Dielectric Strength: 500V Per minute.
 Operation Temperature: -55°C to +105°C.
 Contact Resistance: 35 Milliohms Maximum.

MATERIALS

Contact: Copper Alloy.
 Insulator: PBT UL 94V-0 Rated.
 Shell: SPCC.

PLU020180

No.	A	B	C	D
09	16.92	24.99	30.81	19.23
15	25.25	33.32	39.14	27.56
25	38.96	47.04	53.04	41.28
37	55.42	63.50	69.32	57.33

www.pewtronic.cz

玄茂科技股份有限公司
HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM			D-SUB SOLDER TYPE STAMPED PIN XX MALE	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
			PLU020180	A

制表日: 2005/09/15

DRAWING. APPROVED
kevin

1 2 3 4 5 6 7 8