



# FGG.1B.310.CLAD52Z

### MECHANICAL DETAILS

Shell Style Model FG\* : Straight plug cable collet and nut for fitting a bend relief

Keying 1 key (alpha=0, plug: male contacts, receptacle: female contacts)

Housing Material Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces

Cable Fixing 4.3 - 5.2 mm

Variant 2 Z : Nut for fitting a bend relief

	A	L	M	S1	S2
Mm.	12	42	31	10	9
In.	0.47	1.65	1.22	0.39	0.35

### PERFORMANCE DETAIL

Insert 1B.310 : 10 Low Voltage

Insulator L: PEEK

Specifications

Contact Type: Solder

Max. Matings: 5000

Contact Dia.: 0.5 mm (0.02in)

Bucket Dia.: 0.45 mm (0.018in)

Max. Solid 0.09 mm<sup>2</sup> (AWG 28)

Max. Stranded 0.09 mm<sup>2</sup> (AWG 28)

R (max): 8.7 mOhm

### OTHER CHARACTERISTICS

Shell Style/Model Libellé

Temp (min) -55°C

Temp (max) +250°C

Humidity (max): <=95% [at 60 deg C /140 F]

Vibration: 15 g [10 Hz - 2000 Hz]

Shock Resistance: 100 g [ 6 ms]


Salt Spray >144 hr

Climatical 50/175/21

Shielding (min): 75 dB (10 MHz)

Shielding (min): 40 dB (1 GHz)

IP Rating 50

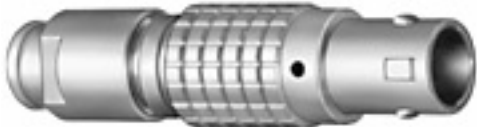

### Available Download

unipole\_multipole.pdf

### Related links

- [Contact](#)
- [Quote Request](#)
- [Catalogs Downloads](#)
- [Catalogs Requests](#)
- [Sample Request](#)
- [3D drawings](#)