


MECHANICAL DETAILS

- Shell Style Model** FG* : Straight plug cable collet
- Keying** 1 key (alpha=0, plug: male contacts, receptacle: female contacts)
- Housing Material** Brass (chrome plated) shell and collet nut, nickel plated brass latch sleeve and mid pieces
- Cable Fixing** 3.3 - 4.2 mm
- Variant 2** Z : Nut for fitting a bend relief

	A	L	M	S1	S2
Mm	15	49	37	13	12
In.	0.59	1.93	1.46	0.51	0.47

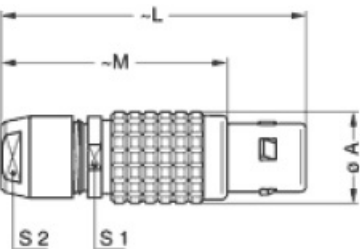

PERFORMANCE DETAIL

- Insert** 2B.708 : 1 High V. 8 Low V.
- Insulator** J: PEEK/PEEK
- Specifications**
- Contact Type:** Solder



OTHER CHARACTERISTICS

- Shell Style/Model** Libellé
- Temp (min)** -55°C
- Temp (max)** +250°C
- Humidity (max):** <=95% [at 60 deg C /140 F]
- Vibration:** 15 g [10 Hz - 2000 Hz]
- Shock Resistance:** 100 g [6 ms]
- Salt Spray** >1000 hr
- Climatical** 50/175/21
- Shielding (min):** 75 dB (10 MHz)
- Shielding (min):** 40 dB (1 GHz)
- IP Rating** 50

