



1 2 3 4 5 6 7 8

A **Housing:** Glass Filled Polyester UL94V-0,Black
Contact: 0.45mm Diameter Phosphor Bronze Gold Plating Over Nickel

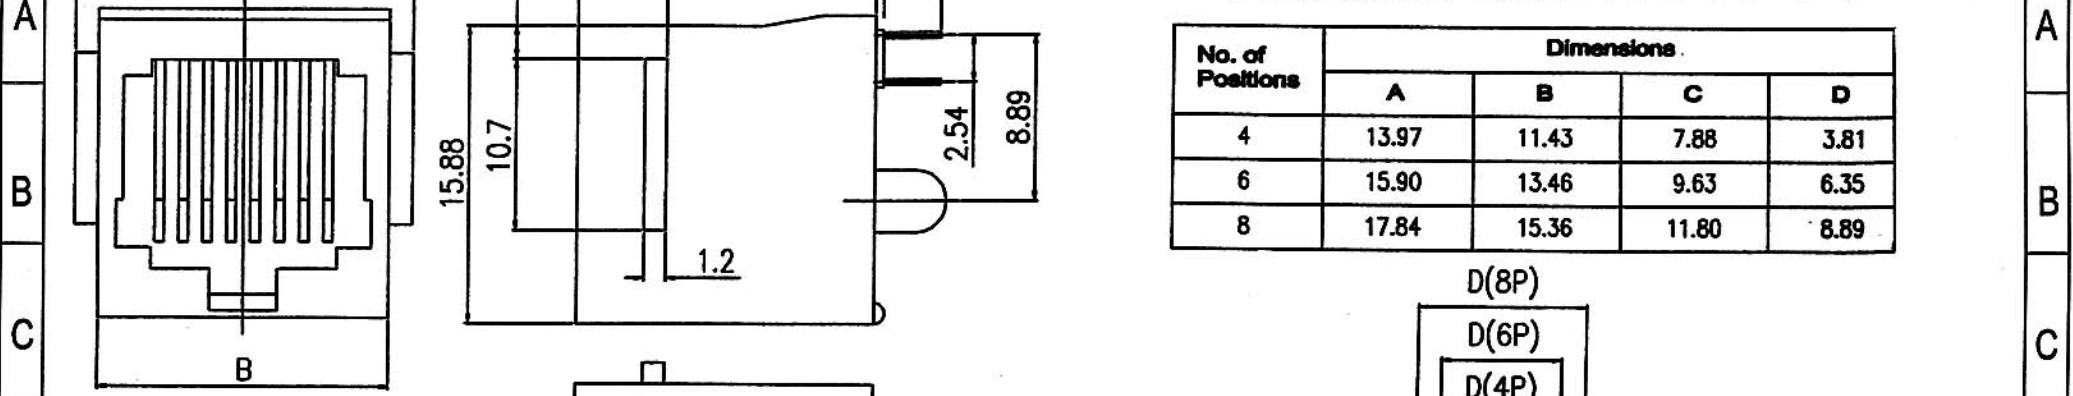

No. of Positions	Dimensions			
	A	B	C	D
4	13.97	11.43	7.88	3.81
6	15.90	13.46	9.63	6.35
8	17.84	15.36	11.80	8.89

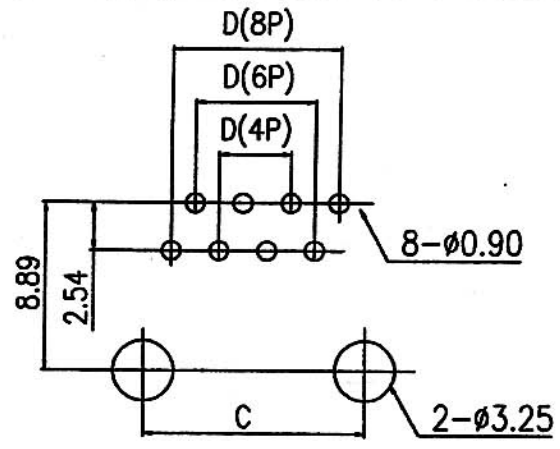

PCB Layout

ORDER INFORMATION

Contact No.	Body Option	Foot Type	Contact Plating	Insulator Color	0	0
C0052 - 44	A	H	G	B	0	0
42 : 4P2C 44 : 4P4C 62 : 6P2C 64 : 6P4C 66 : 6P6C 88 : 8P8C	A: With Panel Stop (Unshielded) B: Without Panel Stop (Unshielded)	H: Half Round Foot S: Split Foot	G: Gold Flash K: Gold 6u" C: Gold 15u" D: Gold 30u" H: Gold 50u"	B: Black W: White G: Grey	0 FILL It With '0'	0 FILL It With '0'

玄茂科技股份有限公司
 HSUAN MAO TECHNOLOGY CO., LTD.

UNIT		SCALE	PART NAME	
MM		1.5 : 1	TOP ENTRY P.C.B. JACK "F" TYPE HALF ROUND FOOT	
APPD.	CKD.	TOLERANCE	PART NO.	REV.
		± 0.3	C0052-XXAHXX00	A

制表日: 2002/12/04
 DRAWING. Jane
 APPROVED

1 2 3 4 5 6 7 8