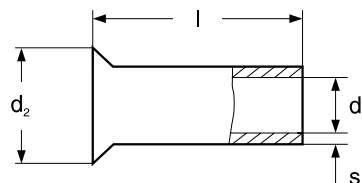


LISOVACÍ DUTINKY BEZ IZOLACE

GPH

dle DIN 46228

pro Cu laněné vodiče (nelze použít pro plné vodiče!)

Materiál: měď**Povrchová úprava:** galvanické pocínování

| Označení | Průřez vodiče v mm ² | Rozměry v mm | | | | |
|-----------|------------------------------------|-----------------|----------------|----------------|------|--|
| | | l | d ₁ | d ₂ | s | |
| DN 4-9 | 4 | 9,0 | 2,8 | 4,0 | 0,20 | |
| DN 4-12 | | 12,0 | 2,8 | 4,0 | 0,20 | |
| DN 4-18 | | 18,0 | 2,8 | 4,0 | 0,20 | |
| DN 6-10 | 6 | 10,0 | 3,5 | 4,7 | 0,20 | |
| DN 6-15 | | 15,0 | 3,5 | 4,7 | 0,20 | |
| DN 6-18 | | 18,0 | 3,5 | 4,7 | 0,20 | |
| DN 10-12 | 10 | 12,0 | 4,5 | 5,8 | 0,20 | |
| DN 10-15 | | 15,0 | 4,5 | 5,8 | 0,20 | |
| DN 16-12 | 16 | 12,0 | 5,8 | 7,5 | 0,20 | |
| DN 16-15 | | 15,0 | 5,8 | 7,5 | 0,20 | |
| DN 16-18 | | 18,0 | 5,8 | 7,5 | 0,20 | |
| DN 16-25 | | 25,0 | 5,8 | 7,5 | 0,20 | |
| DN 25-12 | 25 | 12,0 | 7,3 | 9,5 | 0,20 | |
| DN 25-18 | | 18,0 | 7,3 | 9,5 | 0,20 | |
| DN 25-25 | | 25,0 | 7,3 | 9,5 | 0,20 | |
| DN 35-12 | 35 | 12,0 | 8,3 | 11,0 | 0,20 | |
| DN 35-18 | | 18,0 | 8,3 | 11,0 | 0,20 | |
| DN 35-25 | | 25,0 | 8,3 | 11,0 | 0,20 | |
| DN 50-18 | 50 | 18,0 | 10,3 | 13,0 | 0,30 | |
| DN 50-25 | | 25,0 | 10,3 | 13,0 | 0,30 | |
| DN 70-25 | 70 | 25,0 | 12,5 | 15,0 | 0,40 | |
| DN 95-25 | 95 | 25,0 | 14,5 | 17,0 | 0,40 | |
| DN 120-32 | 120 | 32,0 | 16,5 | 19,0 | 0,50 | |
| DN 150-32 | 150 | 32,0 | 18,5 | 21,0 | 0,50 | |
| DN 185-32 | 185 | 32,0 | 20,0 | 23,5 | 0,50 | |
| DN 240-40 | 240 | 40,0 | 22,8 | 25,8 | 0,60 | |

Doplňující údaje:

- lisovací nářadí viz. kap. 9, 10