
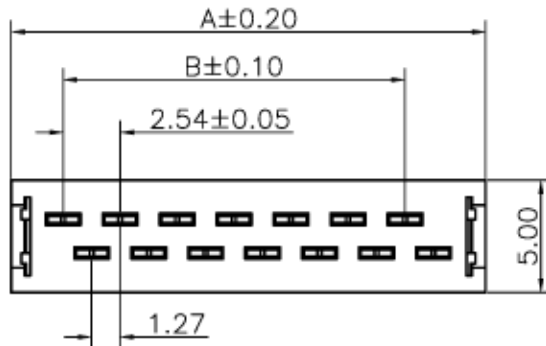


This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for the manufacture or sale by anyone other than Amphenol Corporation without its prior consent, and that no right is granted to disclose or to use any information in this document.

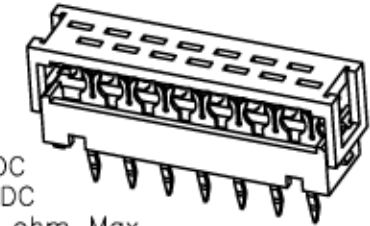





Circuits	Dimension	
	A	B
4	8.45	2.54
6	10.99	5.08
8	13.53	7.62
10	16.07	10.16
12	18.61	12.70
14	21.15	15.24
16	23.69	17.78
18	26.23	20.32
20	28.77	22.86
22	31.31	25.40
24	33.85	27.94
26	36.39	30.48

Specifications:

Current rating:1.0A AC,DC
 Voltage rating:30V AC, DC
 Contact resistance:20m ohm Max
 Insulation resistance:1000M ohm Min
 Withstanding voltage:AC 500V AC/minute
 Operating Temperature:-40°C ~ +105°C
 Materials:

Insulator:High Temp Plastic UL94V-0
 Contact material:Phosphor Bronze
 Finish:Tin Plated

How to Order

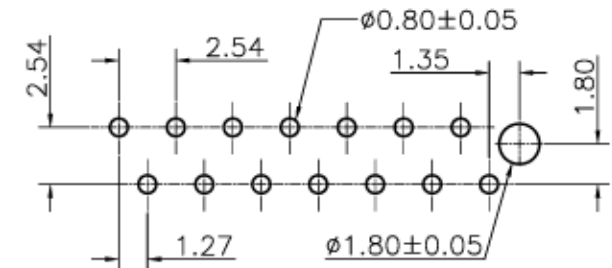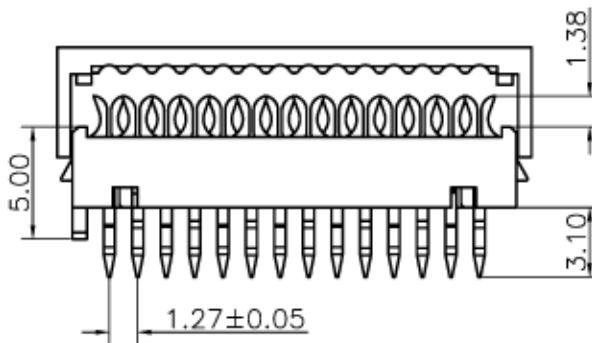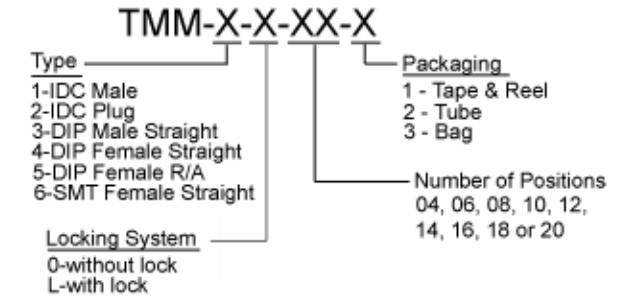

PCB Layout



TOLERANCE (mm)	APPROVALS	DATE	TITLE	AMPHENOL Amphenol European Design Center	
X. ±0.3	DRAWN Stephane	2006/04/22	Micro Match IDC Plug	Scale N.A.	Sheet 1 of 1
X.X ±0.1	CHECKED Rob K.	2006/04/23			
X.XX ±0.05	APPROVED Rob K.	2006/04/23			
UNLESS OTHERWISE SPECIFIED	UNIT:	MM	SIZE: A4	DRAWING N°: TMM-2-0-XX-X	REV: A