
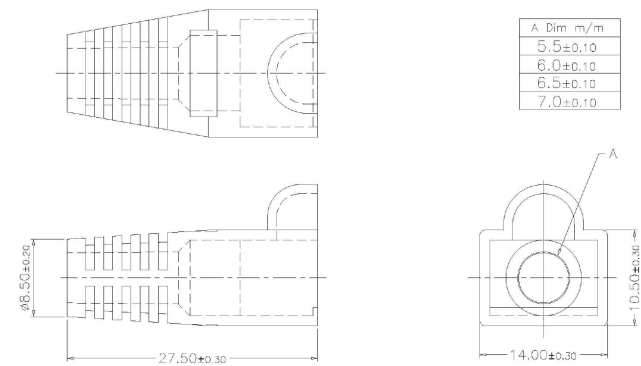


NOTES:

1. Operating Temperature: -10°C~ + 60°C
2. Electrical Characteristics:
 - 2.1 Rated Current: 125V AC, 1.5 A@25°C
 - 2.2 Contact Resistance: 20mΩ Max
 - 2.3 Insulation Resistance: 500MΩ Min, 100V DC/min.
 - 2.4 Voltage Proof: 1000V AC/1 minute no breakdown
3. Mechanical Characteristics:
 - 3.1 Insertion Force & Withdrawal Force: 30N Max
 - 3.2 Durability: 750 cycles Min.
4. Environmental compliance:
 - 4.1 RoHS and Reach compliant

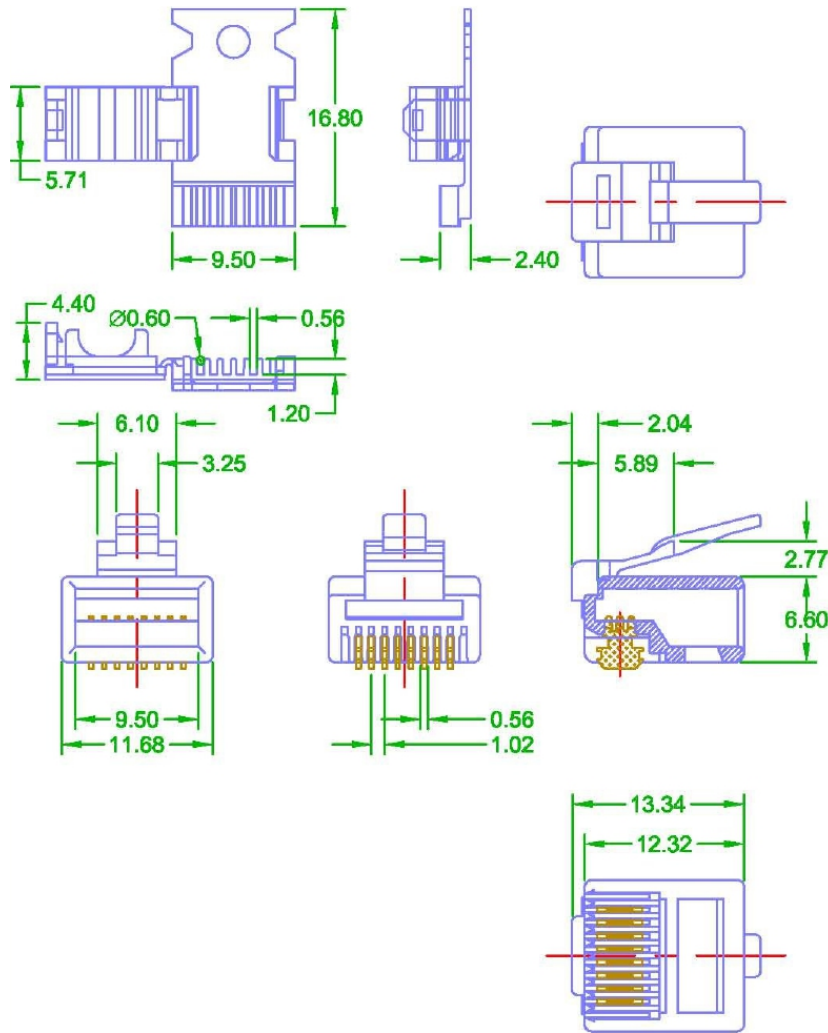

HAR&CA SRL RESERVES THE RIGHT TO CHANGE SPECIFICATION OR CONFIGURATION WITHOUT PRIOR NOTIFICATION. THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF HAR&CA SRL AND SHOULD NOT BE REPRODUCED OR COPIED WITHOUT WRITTEN PERMISSION.

<p>HAR&CA</p>		TITLE:	
		<p>CAT6 UTP RJ45 with cover for FLAT CABLE</p>	
DRAW: RF	DATE: 2019-06-04	UNITS:	DWG NO.:
CHKD: MF	DATE: 2019-06-04	FINISH:	DWG VER
VRFD:	DATE:	MASS(Kg):	ITEM NO.:
APPD: MF	DATE: 2019-06-05	SCALE:	H-CN11-154G/FC
PRODUCT:		SHEET: 1 OF 1	MAT'L: