




Bootlace Ferrules

SPECIFICATION:

Temperature range	-40 ... +105 °C
Material	Copper
Insulation material	Polypropylene
Surface material	Tin-Plated
Termination	Crimp

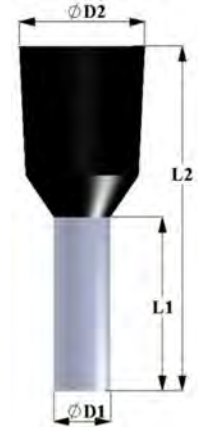

UL certified: E502427

Colour System

French	German	DIN	Wire Range	Pin Length (L1)	Overall Length (L2)	Terminal Diameter (D1)	Outside Diameter (D2)
	Grey RND 465-00552		22 AWG 0.14 mm ²	6 mm	10 mm	0.7 mm	1.2 mm
Violet RND 465-00565	Light Blue RND 465-00537		24 AWG 0.25 mm ²	6 mm	10 mm	0.75 mm	1.9 mm
RND 465-00899	RND 465-00538		24 AWG 0.25 mm ²	8 mm	12 mm	0.75 mm	1.9 mm
Pink RND 465-00908	Turquoise RND 465-00564		22 AWG 0.34 mm ²	6 mm	10 mm	0.80 mm	1.9 mm
RND 465-00558	RND 465-00563		22 AWG 0.34 mm ²	8 mm	12 mm	0.80 mm	1.9 mm
White RND 465-00566	Orange RND 465-00556	White RND 465-00566	20AWG 0.5 mm ²	8 mm	14 mm	1 mm	2.6 mm
Blue RND 465-00540	White RND 465-00567	Grey RND 465-00546	18 AWG 0.75 mm ²	8 mm	14 mm	1.2 mm	2.8 mm
RND 465-00541	RND 465-00568	RND 465-00883	18 AWG 0.75 mm ²	12 mm	18 mm	1.2 mm	2.8 mm
Red RND 465-00559	Yellow RND 465-00569	Red RND 465-00559	18 AWG 1.0 mm ²	8 mm	14 mm	1.4 mm	3 mm
RND 465-00562	RND 465-00570	RND 465-00562	18 AWG 1.0 mm ²	12 mm	18 mm	1.4 mm	3 mm
Black RND 465-00533	Red RND 465-00561	Black RND 465-00533	16 AWG 1.5 mm ²	8 mm	14 mm	1.7 mm	3.5 mm
RND 465-00531	RND 465-00560	RND 465-00531	16 AWG 1.5 mm ²	10 mm	16 mm	1.7 mm	3.5 mm
RND 465-00534	RND 465-00884	RND 465-00534	16 AWG 1.5 mm ²	18 mm	24 mm	1.7 mm	3.5 mm