


www.pewtronic.cz

PLU030155

TFL 282 202, RLL

Product Information

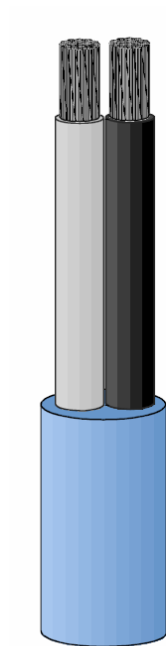

Conductor

Stranded, annealed copper, tinned, flexible, class 5 according to IEC 60228.

Insulation

Flame retardant polyethylene, black and grey.

Sheath

Flame retardant TPE, blue.

Operating voltage

Max 100 V

Operating temperature

Max 80 °C

Fire resistance

IEC 60332-3 cat C

Application

Connecting cable for use in telecom equipment where good flexibility is required.

Technical data

Part no.	Conductors x size	Diameter, nom. (mm)			Weight/100m (kg)	Resistance (Ω /km)
		Conductor	Insulation	Sheath		
TFL 282 202	2 x 2,5 mm ² 14AWG	2,0	2,8	7,8	11,3	7,98

Ordering Information

Part no.	Conductors x size	Length (m)	Drum	Total weight (kg)
TFL 282 202	2 x 2,5 mm ² 14AWG	500	K5	65,8

We reserve the right for alterations due to continual product development and/or changes in standards.