
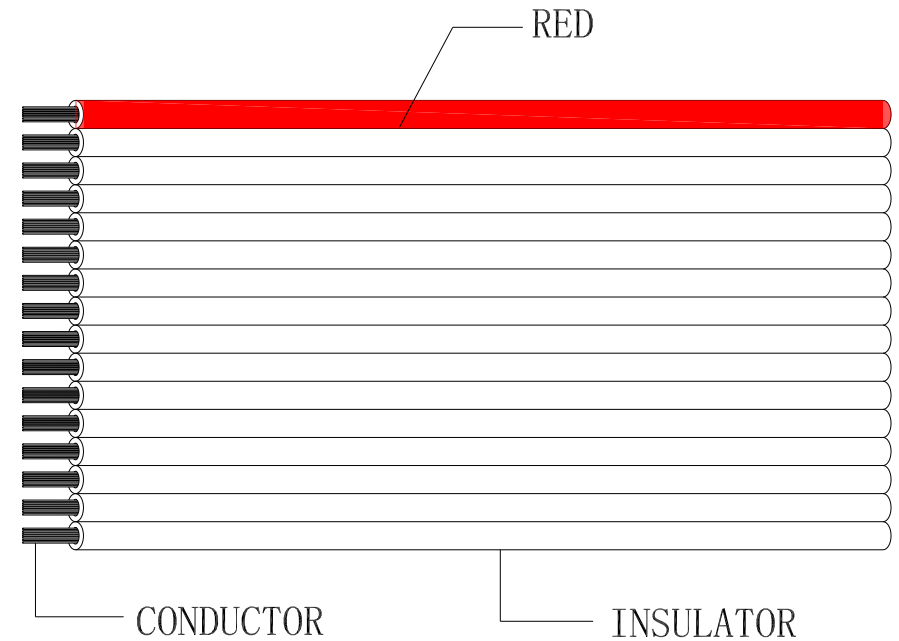


No. de Cores	Dimensoes do Condutor		Espessura (mm ± 0.05)	Largura (mm)	PT (mm)
	(AWG)	Composicao (solido/mm)			
9	28	7/0.102	0.9	11.43	± 0.30
10	28	7/0.102	0.9	12.70	± 0.30
14	28	7/0.102	0.9	17.78	± 0.30
15	28	7/0.102	0.9	19.05	± 0.30
16	28	7/0.102	0.9	20.32	± 0.30
20	28	7/0.102	0.9	25.40	± 0.30
25	28	7/0.102	0.9	31.75	± 0.30
26	28	7/0.102	0.9	33.02	± 0.30
30	28	7/0.102	0.9	38.10	± 0.30
34	28	7/0.102	0.9	43.18	± 0.40
36	28	7/0.102	0.9	45.72	± 0.40
40	28	7/0.102	0.9	50.80	± 0.40
50	28	7/0.102	0.9	63.50	± 0.40
60	28	7/0.102	0.9	76.20	± 0.40
64	28	7/0.102	0.9	81.28	± 0.40

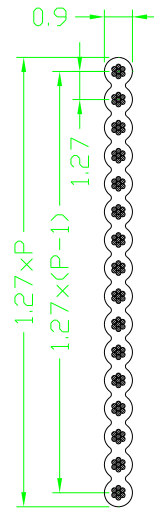

- CONDUCTOR: BARE COPPER 28AWG
- INSULATOR: MATERIAL PVC