

UL 2468 Flat Ribbon Wire 80 300V**說明**

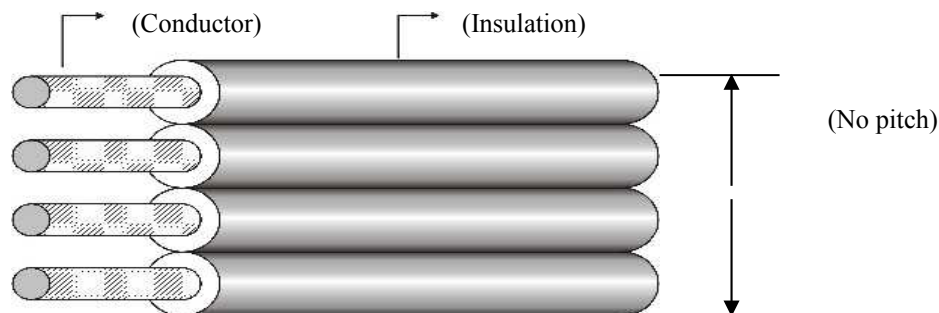
- 28-16AWG
- PVC
- 80 300Volts
- UL VW-1 CSA FT1

Product Description

- Tinned, or bare copper, stranded or Solid conductor, 28-16AWG
- Lead Free PVC Insulation.
- Rated Temperature: 80 ; Rated Voltage: 300 Volts
- Passed UL VW-1 & CSA FT1 vertical flame test.

應用**Applications**

- Suitable for internal wiring of electronic equipment and computers..

構造及電氣性能(Structure & electrical properties)

UL 2468 CSA TYPE	Range		Conductor		No. Cores	Insulation		Maximum Conductor Resistance Ω/km	(VAC/min) Insulation Potential Strength
	Temp	Voltage V	AWG	NO./mm		Thickness mm	O.D mm		
	80	300V	28	7/0.127	2	0.40	1.10x2.20	248	2000
				7/0.127	3	0.40	1.10x3.30		
				7/0.127	4	0.40	1.10x4.40		
			26	7/0.160	2	0.40	1.30x2.60	152	
				7/0.160	3	0.40	1.30x3.90		
				7/0.160	4	0.40	1.30x5.20		
			24	11/0.160	2	0.40	1.45x2.90	88.6	
				11/0.160	3	0.40	1.45x4.35		
				11/0.160	4	0.40	1.45x5.80		
			22	17/0.160	2	0.40	1.60x3.20	62.5	
				17/0.160	3	0.40	1.60x4.80		
				17/0.160	4	0.40	1.60x5.60		
20	21/0.180	2	0.40	1.85x3.70	39.5				
	21/0.180	3	0.40	1.85x5.55					
18	34/0.180	2	0.40	2.10x4.20	24.4				
	34/0.180	3	0.40	2.10x6.30					