


Flexible data cable, S/UTP, Category 5e, AWG26

CU 5502 4P flex



PRODUCT INFORMATION

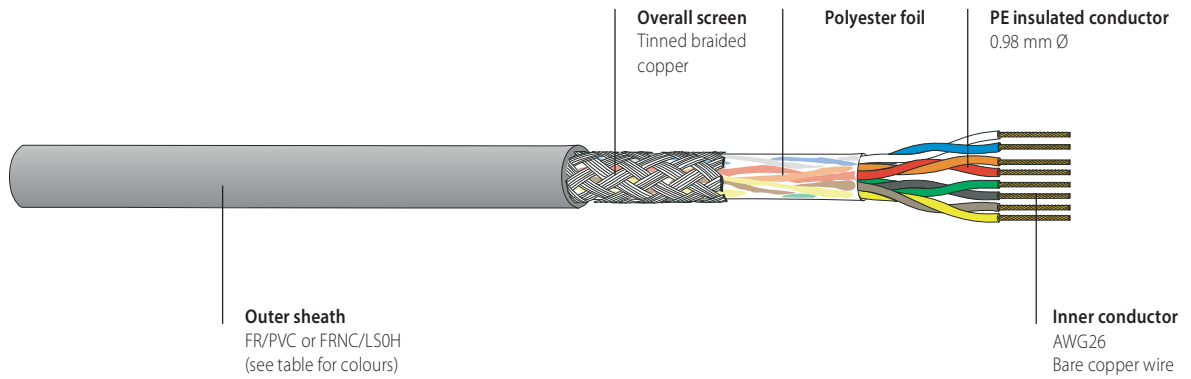

FEATURES

Electrically and mechanically high-quality Cat.5e patch cord - exceeds the requirements of ISO/IEC 11801, IEC 61156-6, EN 50173-1 and EN 50288-2-2.
 Construction optimised for fast and reliable terminations.
 Easy wire identification and termination due to different coloured wires.
 Compatible with all current connecting hardware in accordance with EN 50173 and ISO/IEC 11801.
 Optimised for RJ45 connecting systems.
 Differently coloured sheaths facilitate clearly arranged installations and visual differentiation of services.

APPLICATIONS

As patch cord in patch panels and as equipment connection cable.
 For the transmission of digital and analogue voice, video and data signals.
 Suitable for all ICT network applications up to class D applications (100 MHz) in accordance with EN 50173-1 and ISO/IEC 11801.
 Applicable for Power over Ethernet (PoE) / PoE+.

VERSIONS

Article No.	Colour	Dimension n x n x mm ² (AWG)	Sheath	Sheath Ø mm	Weight kg/km	Cu weight kg/km	Fire load		PU
							kWh/m	MJ/m	
179595	grey	4 x 2 x 0.16 (AWG26)	FR/PVC ¹⁾	5,1	34	23,5	0,11	0,38	1000 m drum
179517	black	4 x 2 x 0.16 (AWG26)	FR/PVC ¹⁾	5,1	34	23,5	0,11	0,38	1000 m drum
179513	green	4 x 2 x 0.16 (AWG26)	FR/PVC ¹⁾	5,1	34	23,5	0,11	0,38	1000 m drum
179514	yellow	4 x 2 x 0.16 (AWG26)	FR/PVC ¹⁾	5,1	34	23,5	0,11	0,38	1000 m drum
179515	red	4 x 2 x 0.16 (AWG26)	FR/PVC ¹⁾	5,1	34	23,5	0,11	0,38	1000 m drum
179516	blue	4 x 2 x 0.16 (AWG26)	FR/PVC ¹⁾	5,1	34	23,5	0,11	0,38	1000 m drum
181101	grey	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181100	orange	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181106	black	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181102	green	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181103	yellow	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181104	red	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181105	blue	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181107	purple	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum
181108	white	4 x 2 x 0.16 (AWG26)	FRNC/LSOH ²⁾	5,1	35	23,5	0,09	0,31	1000 m drum

¹⁾ FR/PVC = Flame Retardant / Polyvinyl Chloride

²⁾ FRNC/LSOH = Flame Retardant Non Corrosive / Low Smoke Zero Halogen