


Dept	
Qty	
DC	1
ED	1
IE	1
ISO	1
PD	1
R&D	1
SD	1
QA	1
QC	1
QE	1

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	JLZ 08/28/20'		

The information provided herein is from CONNPLY Electronic Co., Ltd. and is confidential. Any disclosure to a party other than the recipient is prohibited. The intellectual properties and its rights contained herein, including but not limited to, trademarks, patents, copyrights, trade secrets, and technical know-how, are owned exclusively by CONNPLY or its affiliates. Unauthorized use or reproduction of any part of this document without the prior written consent of CONNPLY is strictly prohibited. CONNPLY may enforce its intellectual property rights at its own discretion, failures or delays in exercising such rights does not constitute a waiver of such rights.

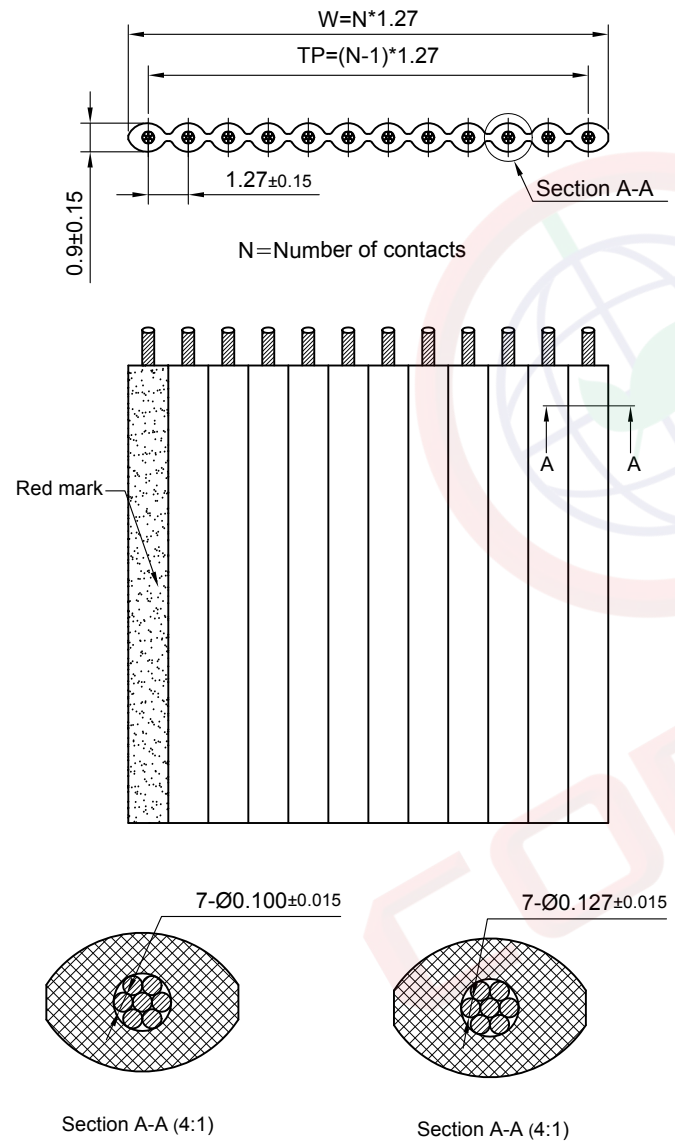

NOTES:

- Materials:**
 - Insulation: PVC, Grey.
 - Conductor: Copper with tin plating.
- Specification:**
 - Rating: 300V
 - Conductor Size: 28AWG or 30AWG.
 - Insulation resistance: 100MΩ/km min.
 - Operating temperature: -20°C~70°C.
- Application**
 - Internal wiring of computers, electronic exchanges, measurement control devices, business machines, communication devices, and other electronic equipment.

4. Product Number Code

DS1057 - X X X X X-X

- Packing Specifications
 - 30.5: 30.5m/reel(100ft)
 - 61.0: 61.0m/reel(200ft) (For Dark Grey Only)
 - 76.5: 76.5m/reel(250ft)
 - 153.0: 153m/reel(500ft)
 - 459.0: 459m/reel(1500ft)
- Edge mark
 - R: Red mark
 - F: Flower mark
- Wire diameter
 - 1: Ø0.100 (30AWG)
 - 2: Ø0.127 (28AWG)
- Wire AWG
 - 28: 28AWG
 - 30: 30AWG
- Cable color
 - A: Gray
 - S: Dark Grey
- No. Of positions
 - 06: 6pin
 - 64: 64pin

Number	Dimensions			Max. conductor resistance DC 20°C Ω/m	
	TP(mm)	W(mm)	Tolerance		
06	6.35	7.62	±0.30	Ø0.100<0.397	
08	8.89	10.16	±0.30		
10	11.43	12.70	±0.30		
14	16.51	17.78	±0.30		
16	19.05	20.32	±0.30		
20	24.13	25.40	±0.30		
24	29.21	30.48	±0.30		
26	31.75	33.02	±0.30		
30	36.83	38.10	±0.30		Ø0.127<0.237
34	41.91	43.18	±0.40		
40	49.53	50.80	±0.40		
50	62.23	63.50	±0.40		
60	74.93	76.20	±0.40		
64	80.01	81.28	±0.40		

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	2651 GRAY FLAT CABLE	
X.	±0.60	X.	±5°	UNITS	mm			
.X	±0.38	.X	±3°	SHEET SIZE	A4	SERIES	DS1057 SERIES	
.XX	±0.25	.XX	±2°	晨翔电子有限公司 CONNPLY ELECTRONIC CO. LTD				
DRAWING TYPE		CUSTOMER						
SCALE	1:1	SHEET	1 OF 1					
DRAWING NO.		C-DS1057-XXXXX-X-A		www.pewtronic.com				