


UNITRONIC® LiYCY

Screened data transmission cable with colour code acc. to DIN 47100

UNITRONIC® LiYCY: Low-frequency PVC data cable DIN 47100 coded Flexible (0.34mm² multi-wire Maxi TERMI-POINT®) Flame retardant Screened, Instrumentation Control

Info

CPR: Article number choice under www.lappkabel.com/cpr

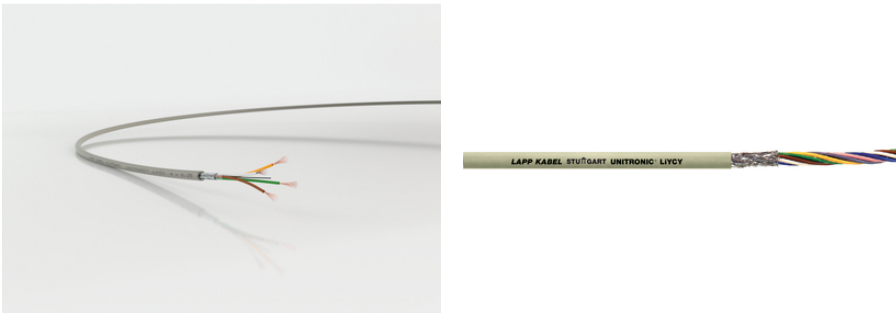

Interference signals

Benefits

Overall braid minimises electrical interference
Multifunctional application possibilities

Application range

Screened cables with small dimensions are suitable for use in computer systems, instrumentation technology, office equipment, balances.
Dry or damp rooms

Product features

Flame-retardant according IEC 60332-1-2

Norm references / Approvals

Based on VDE 0812

Product Make-up

Fine-wire/multi-wire (0.34 mm²) strand made of bare copper wires
Core insulation made of PVC
Tinned-copper braiding

Last Update (14.04.2020)

©2020 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.

PN 0456 / 02_03.16

UNITRONIC® LiYCY

Outer sheath made of PVC

Outer sheath colour: grey (similar to pebble grey/ RAL 7032)

Technical Data

Classification ETIM 5:	ETIM 5.0 Class-ID: EC000104 ETIM 5.0 Class-Description: Control cable
Classification ETIM 6:	ETIM 6.0 Class-ID: EC000104 ETIM 6.0 Class-Description: Control cable
Core identification code:	DIN 47100 without colour repetition, refer to Appendix T9
Mutual capacitance:	C/C: approx. 120 nF/km C/S: approx. 160 nF/km
Inductivity:	approx. 0.65 mH/km
Conductor stranding:	Stranded, fine-wire 0.34 mm ² : 7-wire
Minimum bending radius:	Occasional flexing: 15 x outer diameter Fixed installation: 6 x outer diameter
Temperature range:	Occasional flexing: -5 °C to +70 °C Fixed installation: -40 °C to +80 °C

Note

Unless specified otherwise, the shown product values are nominal values. Detailed values (e.g. tolerances) are available upon request.

Copper price basis: EUR 150/100 kg. Refer to catalogue appendix T17 for the definition and calculation of copper-related surcharges.

Please find our standard lengths at: www.lappkabel.de/en/cable-standardlengths

Packaging size: coil ≤ 30 kg or ≤ 250 m, otherwise drum

Please specify the preferred type of packaging (e.g. 1 x 500 m drum or 5 x 100 m coils).

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.



UNITRONIC® LiYCY

PRODUCT INFORMATION

Article number	Number of cores and mm² per conductor	Outer diameter [mm]	Copper index [kg/km]	Weight [kg/km]
UNITRONIC® LiYCY				
0034302	2 x 0.14	3.9	12	20
0034303	3 x 0.14	4.1	13	28
0034304	4 x 0.14	4.3	14.3	33
0034305	5 x 0.14	4.6	15.5	38
0034306	6 x 0.14	4.9	18.2	38
0034307	7 x 0.14	4.9	19	49
0034308	8 x 0.14	5.8	21.2	56
0034310	10 x 0.14	6.1	28.5	66
0034312	12 x 0.14	6.3	30.4	78
0034314	14 x 0.14	6.7	32	80
0034315	15 x 0.14	6.9	37.8	86
0034316	16 x 0.14	7	43	90
0034318	18 x 0.14	7.3	48.8	95
0034320	20 x 0.14	7.7	53.9	100
0034321	21 x 0.14	7.9	55.5	105
0034324	24 x 0.14	8.3	61	112
0034325	25 x 0.14	8.5	63	120
0034328	28 x 0.14	8.5	66.1	141
0034330	30 x 0.14	8.7	69	155
0034336	36 x 0.14	9.3	83	170
0034340	40 x 0.14	10.4	87.5	178
0034344	44 x 0.14	10.7	110.5	185
0034350	50 x 0.14	11.1	122.5	195
0034402	2 x 0.25	4.5	16	32
0034403	3 x 0.25	4.7	21	37
0034404	4 x 0.25	5	24	41.3
0034405	5 x 0.25	5.6	29	51.2
0034406	6 x 0.25	6	30	58
0034407	7 x 0.25	6	37	65
0034408	8 x 0.25	7.1	42	73
0034410	10 x 0.25	7.5	46	82
0034412	12 x 0.25	7.7	53	98
0034414	14 x 0.25	8	59	99

Last Update (14.04.2020)
 ©2020 Lapp Group - Technical changes reserved
 Product Management www.lappkabel.de
 You can find the current technical data in the corresponding data sheet.
 PN 0456 / 02_03_16