


SILICONE COLD SHRINK TUBE 28x110

PLU040417



- Size: Ø28*110
- I.D:28±1 mm
- Length: 95±5 mm
- Diameter after shrinking: 9±1 mm
- Length after shrinking :110±3 mm
- Thickness of tube:2.5±0.2mm
- Cable diameter range: 7mm ÷ 23mm

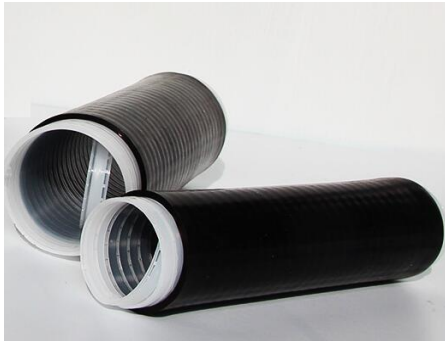

FEATURES/BENEFITS

The Silicone Cold Shrink tube offers a timesaving and easy way to secure a waterproof protection. No tools are necessary for installation. Safer and quicker installation. Reliable sealing and easy to remove. The shrinking process it's done by simply unwinding a removable core.

TECHNICAL SPECIFICATION

PERFORMANCE	TYPICAL VALUE	TEST METHOD
Hardness	40A	ASTM D2240
Tensile Strength	10.3MPa	ASTM D 412
Elongation	990%	ASTM D 412
Tear Strength	41.6N/mm	ASTM D 624
Brittle Temperature	< -40°C	ISO 812
Electric Strength	23KV/mm	ASTM D 4325
Volume Resistivity	1.3×10 ¹⁷ ΩNaN	ASTM D 4325
Flame Resistance	V0	UL94
Thermal Ageing	Pass	ASTM D 412
Ozone Ageing	Pass	ASTM D 1149
UV Ageing	Pass	ASTM G 154
Sealing Class	IP68	IEC60529-1989/2015
Operation Temperature	-55 to +200°C	

STORAGE CONDITION AND WARRANTY

It is recommended to store the cold shrink tubes in a dry climate at a temperature of -40°C up to +50°C, Shelf life is specified with 12 months from date of manufacturing. After installation, the warranty is 36 month excluding human damage and out of specification requirement.



DATA SHEET NO. 612-17
REV. 4 18/01/19

Information and Data may be changed without notice.