

**KC92 SILICONE COLD SHRINK TUBE**

**H-KC92**

**PRODUCT DESCRIPTION**

KC92 Silicone cold shrink Tube

Size: Ø28\*110  
 I.D: 28±3 mm  
 Length: 110±10 mm  
 Relaxed I.D: 10±1 mm  
 Relaxed length: ≥110  
 Average wall thickness: 3±0.5  
 Outer connector range: 7.8mm - 21mm

Size: Ø40\*140  
 I.D: 40±3 mm  
 Length: 125±10 mm  
 Relaxed I.D: 12±1 mm  
 Relaxed length: ≥140  
 Average wall thickness: 3±0.5  
 Outer connector range: 11.7 mm - 35.1 mm




**FEATURES/BENEFITS**

H-KC92 offers a timesaving and easy way to secure a waterproof protection. No tools are necessary for installation. Safer and quicker installation. Reliable sealing and easy to remove. The shrinking process is done by simply unwinding a removable core.

**TECHNICAL SPECIFICATION**

Product line	Coaxial cable accessories
Product type	Weather Seal kit
Coaxial cable type	Foam Dielectric
Colour	Black, Grey
Material	KC97 Silicone cold shrink tube with mastic
Sealing class	IP67
Operation temperature	-60 to +90 °C
Storage temperature	-20 to +50 °C

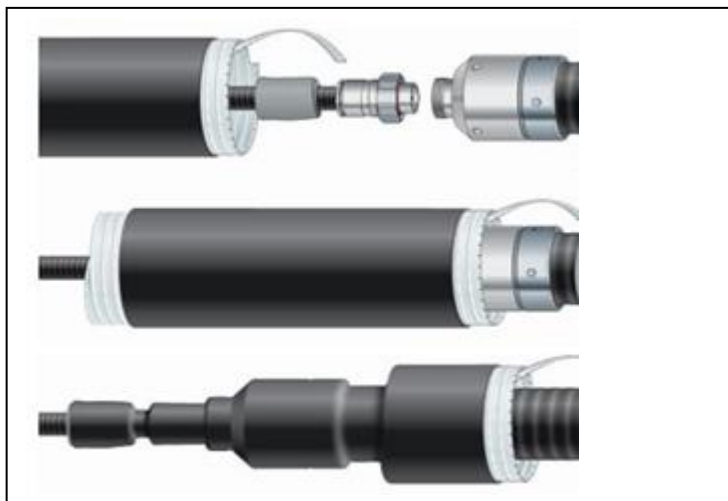

**DATA SHEET NO. 612-17**  
**REV. 0 07/03/17**