


# HGP braided hose

polyester

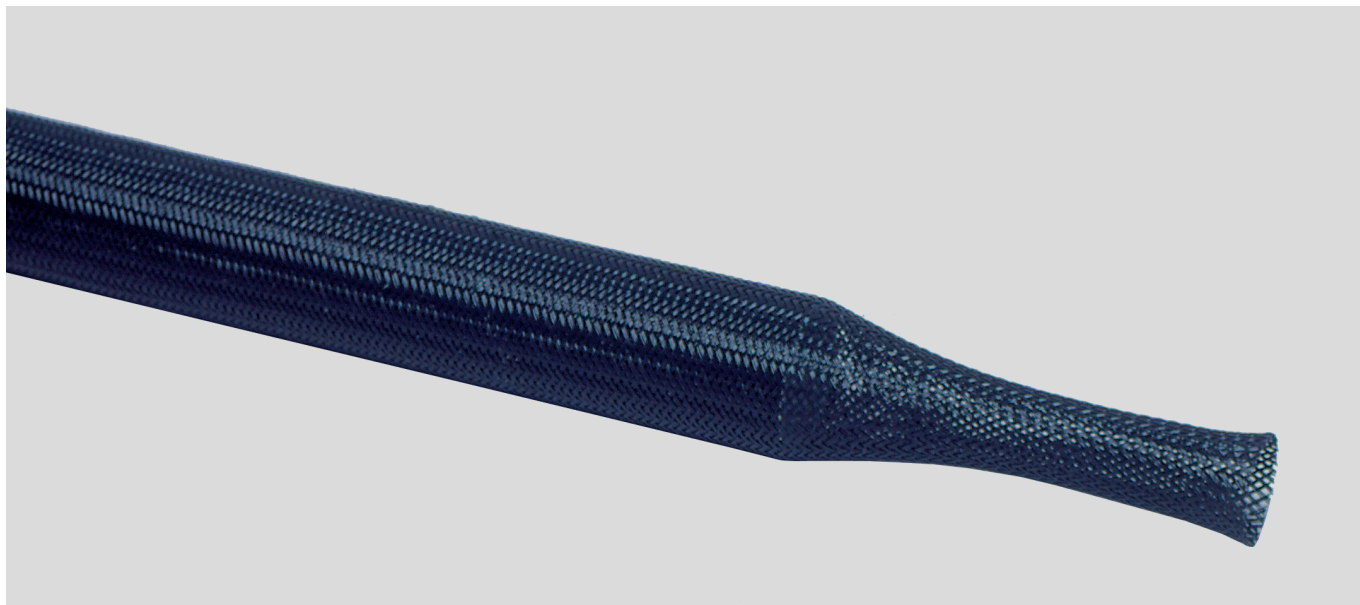

## HGP

Polyester braided sleeve for directionality and for the mechanical protection of electrical cables and lines.

## Application

- Plant and machine construction
- Robot construction
- Automation technology
- Vehicle construction and shipbuilding
- Rail technology
- Installation technology
- Control cabinet construction

## Material

Polyester

- halogen-free

## Properties

Axially compressible

## Technical data

Temperature range: -50°C up to +150°C  
Temperature range temporary up to +220°C

## Polyester

Part no. grey	Part no. black	Min. inner Ø mm	Max. inner Ø mm	Per metres	Net EUR/100 metres at a purchase of		
					up to 100	101 - 500	501 - 1000
94900	98136	1,0	5,0	100,0	o. r.	o. r.	o. r.
94901	98137	2,0	7,0	100,0	o. r.	o. r.	o. r.
94902	98138	3,0	9,0	100,0	o. r.	o. r.	o. r.
94903	98139	4,0	11,0	100,0	o. r.	o. r.	o. r.
94904	98140	5,0	12,0	100,0	o. r.	o. r.	o. r.
94905	98141	7,0	15,0	100,0	o. r.	o. r.	o. r.
94906	98142	8,0	17,0	50,0	o. r.	o. r.	o. r.
94907	98143	10,0	20,0	50,0	o. r.	o. r.	o. r.
94908	98144	14,0	26,0	25,0	o. r.	o. r.	o. r.
94909	98145	18,0	34,0	25,0	o. r.	o. r.	o. r.
94910	98146	20,0	40,0	25,0	o. r.	o. r.	o. r.
94911	98147	30,0	50,0	25,0	o. r.	o. r.	o. r.
94912	98148	40,0	66,0	25,0	o. r.	o. r.	o. r.

Dimensions and specifications may be changed without prior notice.

o. r. = on request