


二.(S-910 Sleeving Standard Sizes)

Size	Inside Diameter (mm)	MIN.wallthickness (mm)	Packing (Meter/Roll)
		4KV	
φ1.0	1.0+0.20/-0	0.35±0.05	100
φ12	12+0.70/-0	0.60±0.06	50
φ16	16+0.6/-0.2	0.60±0.06	50

三.(Engineering Picture of Sleeving)

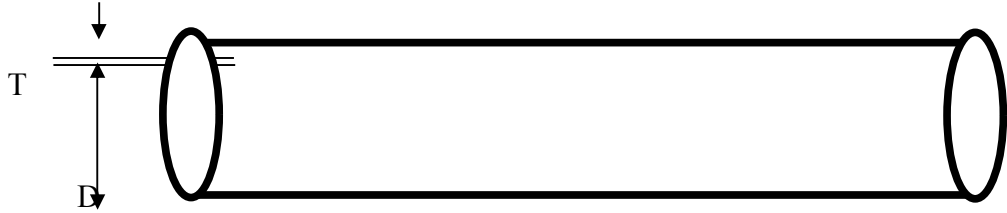

Unit:	Date	Name:	No.
(mm)	2013-12-04	Fiberglass tube	SL-SGS
WuJiang Tuoyan Electronic Materials CO.,Ltd		Drawed by:	Checked by:
		Approved by:	

四 Material Description :

Silicone fiberglass sleeving, woven as sleeving by non-alkali fiberglass and coated with silicone in high temperature. It has excellent dielectricity, automatic quench and softness, widely used in the insulation protection of internal line cluster in H&N machinery, household electrical appliances, electroheat device, special illuminations, TV set and electric instrument.

material			purpose	content	supplier
chinese	ENGLISH	molecular formula			
glass fiber yarn	Glassfiber	SiO ₂ +Al ₂ O ₃ +CaO	temperature resistance	50%	Changzhou tianma
silicone rubber oil	Silicone Rubber	[(CH ₃) ₂ SiO] _n	withstand voltage	50%	Dongzhi