

KC63 ALL WEATHER ELECTRICAL INSULATION PVC TAPE

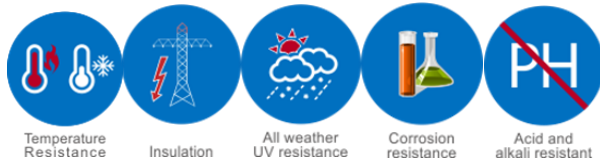
PLU130277

PRODUCT DESCRIPTION

H-KC63 is a professional grade pressure sensitive PVC tape.

It is made by the high elastic base material and coating rubber, excellent electrical insulation and shape.

Apply from -18°C to 105°C temperature range. Widely used in all kinds of mechanical and electrical joint process apply to wire and cable connector of main insulation voltage 600V and below.

**TECHNICAL SPECIFICATION**

PROPERTY	VALUE	TEST METHOD
Tensile strength	57.2N/19mm	ASTM D1000
Elongation at break	≥272%	ASTM D1000
Adhesion to steel	≥4.41N/19mm	ASTM D1000
Dielectric strenght	≥53.2KV/50mm	ASTM D4325
Insulation resistance	5.26*10 ¹² Ω	ASTM D1000
Anti-Ozone	Passed	ASTM D4388
Anti UV aging	Passed	ASTM D4388
Temperature range	-18°C to + 105°C	
Service time	More than 5-10 years	
Shelf-life/Storage time	24 months	

Notes: Data in table represent average of test results.

Package information

Model	Dimension	Color	Packing
H-KC63	19/25mm*0,18mm*20m	Black	100 pcs/Ctn

Instruction Manual

1. Clean up the cable connector
2. 50% overlap wrapped on the cable
3. PVC tape must be at the state without ant tension when using waterproof joint

DATA SHEET NO. 621-17
REV. 0 21/03/17