

This document was generated on 06/09/2021

## PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

**Part Number:** [0039012040](#)  
**Status:** **Active**  
**Overview:** [Mini-Fit Family Power Connectors](#)  
**Description:** [Mini-Fit Jr. Receptacle Housing, Dual Row, 4 Circuits, UL 94V-2, Natural](#)

### Documents:

<a href="#">3D Model</a>	<a href="#">Product Specification PS-5556-002-001 (PDF)</a>
<a href="#">Drawing (PDF)</a>	<a href="#">Application Specification 55560001-AS-000 (PDF)</a>
<a href="#">3D Model (PDF)</a>	<a href="#">Application Specification AS-5557-001-001 (PDF)</a>
<a href="#">Product Specification 55560002-PS-CH-000 (PDF)</a>	<a href="#">Packaging Specification PK-5557-002-000 (PDF)</a>
<a href="#">Product Specification 55560002-PS-ES-000 (PDF)</a>	<a href="#">Test Summary 55560010-TS-000 (PDF)</a>
<a href="#">Product Specification 55560002-PS-SK-000 (PDF)</a>	<a href="#">Test Summary TS-5556-002-001 (PDF)</a>
<a href="#">Product Specification PS-45750-001-001 (PDF)</a>	<a href="#">RoHS Certificate of Compliance (PDF)</a>
<a href="#">Product Specification PS-5556-001-001 (PDF)</a>	

### Agency Certification

CSA	LR19980
UL	E29179

### General

Product Family	Crimp Housings
Series	<a href="#">5557</a>
Application	Power, Wire-to-Board, Wire-to-Wire
Comments	Current = 13A max. per circuit when header is mated to a receptacle loaded with <a href="#">45750</a> series terminals crimped to 16 AWG wire. . See Molex product specification PS-45750-001 for additional current derating information.
Overview	<a href="#">Mini-Fit Family Power Connectors</a>
Product Name	Mini-Fit Jr.
UPC	800753584297

### Physical

Breakaway	No
Circuits (maximum)	4
Color - Resin	Natural
Flammability	94V-2
Gender	Receptacle
Glow-Wire Capable	No
Material - Resin	Nylon
Net Weight	1.025/g
Number of Rows	2
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface	4.20mm
Pitch - Termination Interface	4.20mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40° to +105°C

### Electrical


Current - Maximum per Contact	13.0A
-------------------------------	-------

### Solder Process Data

Lead-free Process Capability	N/A
------------------------------	-----

### Material Info

Engineering Number	5557-04R
--------------------	----------

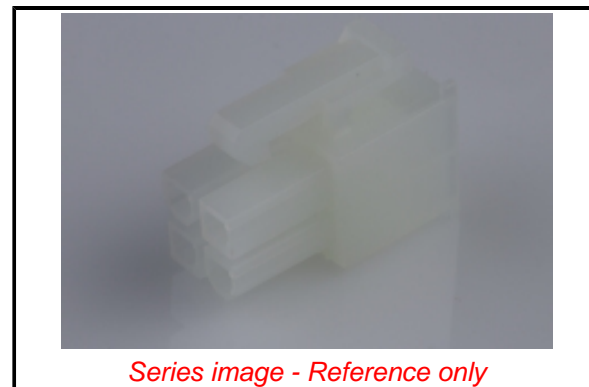

### EU ELV

**Compliant**

### EU RoHS

**Compliant**

### REACH SVHC

Not Contained Per -  
D(2020)9139-DC (19  
Jan 2021)

### Halogen-Free

**Status**

**Low-Halogen**

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

### China RoHS

Green Image

Compliant

Not Contained

### Search Parts in this Series

[5557](#) Series

### Mates With

[5559](#) Dual Row, [5566](#) Vertical with Pegs, [5566](#) Vertical without Pegs, [5569](#) Right Angle Dual Row with Flanges, [5569](#) Right Angle Dual Row with Pegs, [43810](#) , [44068](#) , [44281](#) , [87427](#) , [42404](#) , [42440](#)

### Use With

Mini-Fit Female Crimp Terminals [5556](#)  
 <br>Mini-Fit Plus HCS Crimp Terminal  
[45750](#) <br>Mini-Fit Pre-Crimped Leads  
[797580001](#) , [797580009](#) <br>Mini-Fit Jr.  
 Backshell [204723](#)

**Reference - Drawing Numbers**

Application Specification	55560001-AS-000, AS-5557-001-001
Packaging Specification	PK-5557-002-000
Product Specification	55560002-PS-CH-000, 55560002-PS-ES-000, 55560002-PS-SK-000, PS-45750-001-001, PS-5556-001-001, PS-5556-002-001
Sales Drawing	SD-5557-003-000
Test Summary	55560010-TS-000, TS-5556-002-001

This document was generated on 06/09/2021

**PLEASE CHECK [WWW.MOLEX.COM](http://WWW.MOLEX.COM) FOR LATEST PART INFORMATION**